



## HAWK V FEATURES

- Reverse Articulated Boom Configuration
- Simple Live Hydraulic Control System
- Great Payload in the Vehicle compared to other Manufacturers
- Great Space in the Vehicles
- Greater Outreach
- 2-Man GRP Composite Bucket with Insulating Harness Anchors
- Simple Hydraulic Boom Control
- Ground Controller c/w 5m of Wanderlead
- 360deg Slew Rotation
- Manufactured to ISO EN280:2013 rev2
- Auxiliary Electric Power Pack for Raise and Lower
- Auxiliary Hand pump for Raise and Lower of Booms and Stabilisers
- Engine Start/Stop at Bucket and Ground
- Emergency Stops
- GRP Composite components Fitted for Fuel Saving
- True Great British Design and Built Aerial Device
- Can Mount onto REAR Wheel Drive & Front Wheel Drive.


## OPTIONS

- Walk In Bucket Option
- Operator Interface Screen
- 110v wiring to the Cage
- 12v Wiring to the cage
- 5Kv Chassis Isolation
- Set of spreaderfeet
- Many others on request



# V125

**REVERSE ARTICULATED  
AERIAL DEVICE**

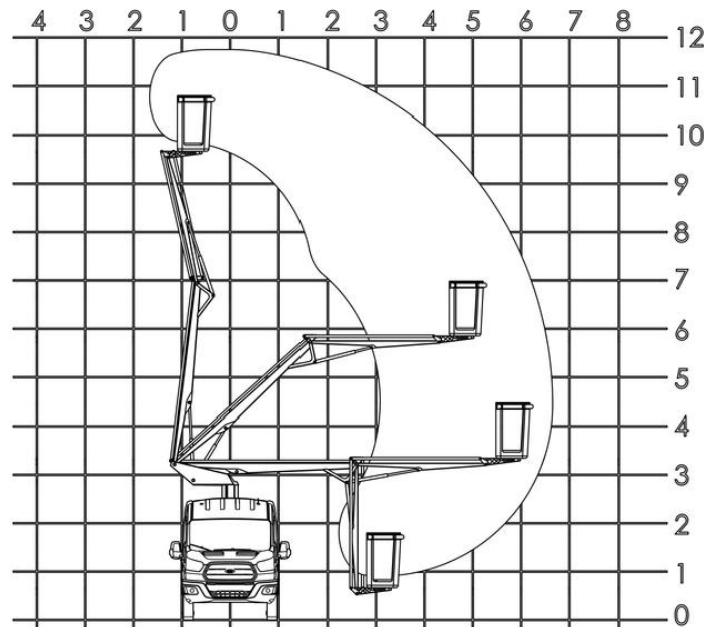

### V125 SPECIFICATION

Max. Working Height	12.3 m
Max. Outreach 1 man	7.1 m
Max. Outreach 2 Man	7.1 m
Max. S.W.L.	200 kg
Payload No Fuel or Driver or Passengers	425kg / 525kg RWD / FWD
Min. GVW	3500kg