




MOUNTED ON A FORD RANGER.



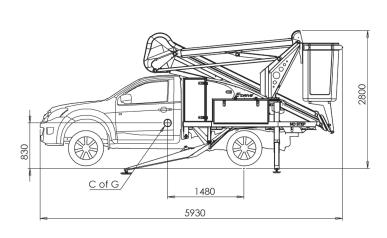

4 3 2 0 2 3 5 A 6 14 13 12 11 10 9 8 250kg 90kg 7 6 5 4 3 2 1 \cap

| | | |
|------|----------|--|
| | חוו | |
| AL | лк | |
| | <u> </u> | |

- Standard CZ140 mounted to standard 3.19t GVW
- Cargo CZ140 mounted to 3.5t-rated GVW
- *E-Drive* our self-charging hybrid electric system
- CAN bus control system with remote connectivity
- Axle Lift Front Stabiliser system for increased stability
- Chassis levelling on 5° slope
- Class-leading payload
- 'Fit and forget' bushes no greasing required
- Operator feedback for fault diagnostics
- Insulated harness anchors for low voltage protection
- Auxiliary electric power pack in case of main pump failure
- Ground controller with 5m of wander lead.
- ... Other options available on request.



5.5m

6.8m

Digital

Inside vehicle mirrors

Note: Gross payload: indicative of standard platform, full tank of fuel only Net payload: Indicative of full tank of fuel, spreader pads & chocks and 160kg operators.



Aldercote Ltd. The Embankment, Woodhouse Street Kingston upon Hull, HU9 1RJ, UK +44 (0)1482 222377, sales@aldercote.com

♥f ◎ in ► © 2024 Registered in England No. 3780815

Max. lateral outreach 250kg

Max. lateral outreach 90kg

Tail swing

Control type

